




INTER•PAK SERIES APT-40X

See for yourself how we crush the competition!

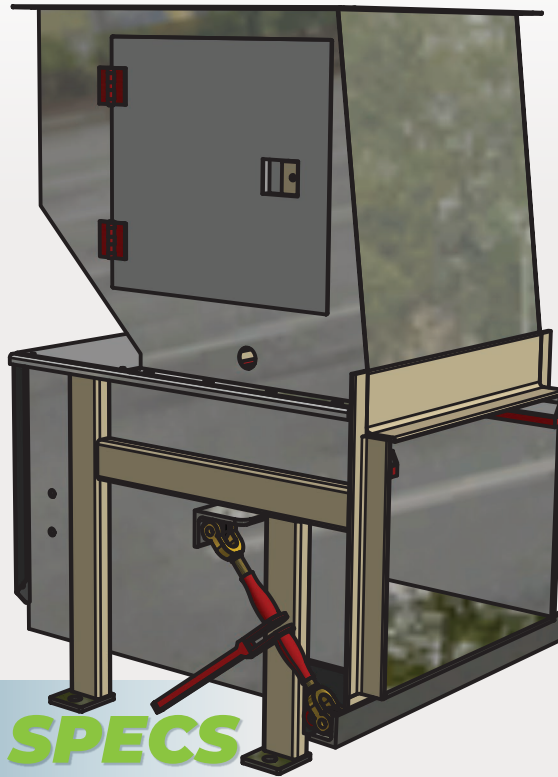

FEATURES & SPECS

CHARGE BOX

CYCLE TIME- 14 SECONDS
OPENING: 22.5" X 30"
SIDES: 3/16" THICK WITH STRUCTURAL SUPPORTS
FLOOR: 3/8" THICK PLATE WITH 3" CHANNEL CROSSMEMBERS
BREAKER BAR: 4" X 4" X 1/2"

RAM

FACE PLATE: 3/8" THICK
BOTTOM: 3/8" THICK
SIDES: 3/16" THICK
TOP: 1/4" THICK WITH 4" CHANNELS
PENETRATION: 4"
NORMAL FORCE: 13,900 LBS MAX FORCE: 16,400LBS
RAM FACE PRESSURE- NORMAL: 23.16 PSI MAX: 27.33PSI

ELECTRICAL

MOTOR: 5 HP 3/60-208/230/460 VAC
CONTROL VOLTAGE: 120 VAC
15' REMOTE PENDANT WITH 4 BUTTON STATION
15' REMOTE COLOR-CODED PRESSURE GAUGE
KEY AUTO/HAND, EMERGENCY STOP WITH LIGHT, START, FOR/REV
100% LIGHT: 1650 PSI
15' POWER PIG TAIL
PHOTO EYE/ LIGHT AND SIREN FOR AUTO START INCLUDED



HYDRAULIC

RESERVOIR CAPACITY: GALLONS
 PUMP: 6 GPM
 NORMAL PRESSURE: 1650 PSI MAX PRESSURE: 1950 PSI
 HYDRAULIC CYLINDER:
 BORE: 2.5" ROD: 1.25" STROKE: 18.5"

AVAILABLE OPTIONS

OIL TANK HEATER
 LOW TEMPERATURE OIL
 80% FULL LIGHT

COLORS



**Color Match Available*

