



VC-100 6YD, 8YD Vertical Compactors

Designed for restaurants, grocery stores, motels or other locations with limited space.

The VC-100 vertical compactor features a multi directional head that can be fed from the front, rear, left, or right. This can be easily changed in the field.

The VC-100 also features adjustable legs to accommodate six and eight yard containers. A fully removable top and rear cover allow easy access for maintenance.



- Come with casters
- 8 yard has a high feed height and is meant to be loaded from a dock or platform

Value Added Benefits


- ✓ **Improved efficiency**
- ✓ **Increased performance**
- ✓ **Standard Features**




**Use of an oil heater or extreme cold weather is recommended in extreme cold conditions.*

- Quick cycle times improve employee efficiency; trash is compacted in just 20 seconds
- 16" of ram penetration and over 25,000 lbs of ram force to ensure max compaction
- 4-in-1 head can be changed to feed from front, rear, left or right side
- Adjustable stand can be configured for both 6 and 8 yard containers
- Full container light alerts you when trash is ready for pickup
- Electronic door/container interlock ensures safe operation
- Driver light is illuminated when it is safe for hauler to remove container
- Built-in stops hold container in place to prevent movement during compaction


6YD

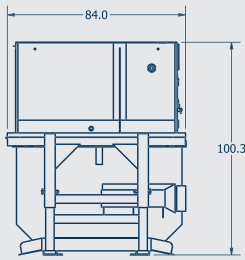


BACK VIEW

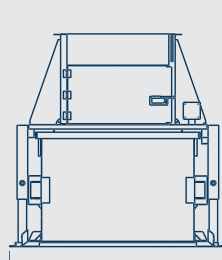

SIDE VIEW




FRONT VIEW

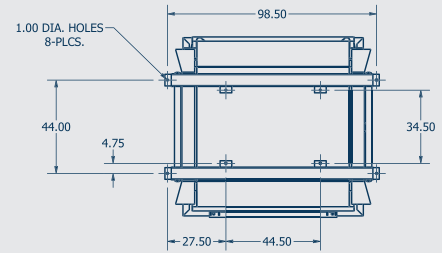


BOTTOM VIEW


8YD




BACK VIEW



SIDE VIEW



FRONT VIEW

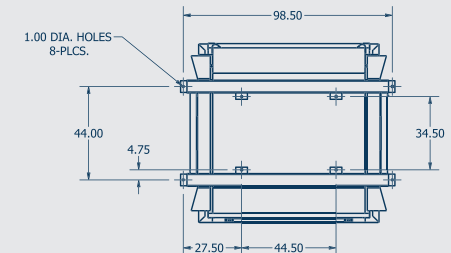

BOTTOM VIEW

Standard Features:

- Multi directional head can be fed from the front, rear, left, or right.
- Adjustable legs can accommodate six and eight yard containers.
- Key operated automatic operation.
- Magnetic interlocking safety switch will not allow the compactor to run while the door is open.
- Container full light alerts you when trash is ready for pickup.
- Low temperature oil works well in hot or cold temperatures. (ultra-low temperature oil, or biodegradable available.)
- Container interlock switch will not allow the compactor to operate while the container is out.
- Driver light is illuminated signaling the hauler it is safe to remove the container.
- Fully removable top and rear cover for ease of maintenance.

Optional Features:

- Oil heater (recommended for extreme cold.)
- Automatic odor suppression
- Ultra-low temperature or biodegradable oil
- Chute extension
- Loading platform
- Through wall installation
- Single phases power unit available.

Charge Box:

- ICC Rating: .5yds
- Compactor weight w/ stand & container
- 6YD: 4,843 lbs • 8YD: 5,032 lbs

Compactor Head:

- Sides: 10ga
- Top Deck: 12ga

Ram:

- Face Plate: 7ga
- Base Plate: 7ga
- Sides: 7ga
- Ram Penetration: 16"

Electrical:

- Motor : 5hp TEFC
- Voltage: 208-230/460 3 PHASE
- Key activated automatic cycle operation
- Single phase option available

Hydraulic:

- Pump: 5.2 gpm
- Tank Reservoir: 15 gal
- Cylinder:
- Bore: 4" Rod:2" Stroke: 16"
- Max Pressure PSI:
- Normal: 1800 Max: 2000
- Max Face Pressure:
- Normal: 22,600 Max: 25,000
- Internal Power Unit Location
- Cycle Time: 20 sec

Colors:

*Color match available

