



VC-100 Vertical-Compactor 6YD, 8 YD



FEATURES & SPECS

COMPACTOR HEAD

- **SIDES:** 10GA
- **TOP DECK:** 12GA

CHARGE BOX

- **ICC RATING:** .5YDS
- **COMPACTOR WEIGHT (W/ STAND & CONTAINER):**
6YD: 4,843 LBS | **8YD:** 5,032 LBS

RAM

- **FACE & BASE PLATES:** 7GA
- **SIDES:** 7GA
- **RAM PENETRATION:** 16"

ELECTRICAL

- **MOTOR:** 5HP TEFC
- **VOLTAGE:** 208-230/460 3 PHASE
- **KEY ACTIVATED AUTOMATIC CYCLE OPERATION**

**SINGLE PHASE OPTION AVAILABLE*

**SINGLE & MULTI-PHASE POWER UNITS AVAILABLE*

HYDRAULIC

- **PUMP:** 5.2 GPM
- **TANK RESERVOIR:** 13 GALLONS
- **CYLINDER:** BORE: 4" | ROD: 2" | STROKE: 16"
- **MAX PRESSURE PSI:** NORMAL: 1800 | MAX: 2000
- **MAX FACE PRESSURE:** NORMAL: 22,600 | MAX: 25,000
- **INTERNAL POWER UNIT LOCATION**
- **CYCLE TIME:** 20 SEC

STANDARD FEATURES

- **MULTI-DIRECTIONAL HEAD** CAN BE FED FROM THE FRONT, REAR, LEFT, OR RIGHT
- **ADJUSTABLE LEGS** CAN ACCOMMODATE 6YD AND 8YD CONTAINERS
- **KEY OPERATED AUTOMATIC OPERATION**
- **MAGNETIC INTERLOCKING SAFETY SWITCH** WILL NOT ALLOW THE COMPACTOR TO RUN WHILE THE DOOR IS OPEN
- **CONTAINER INTERLOCK SWITCH** WILL NOT ALLOW THE COMPACTOR TO OPERATE WHILE THE CONTAINER IS OUT
- **CONTAINER FULL LIGHT** ALERTS YOU WHEN TRASH IS READY FOR PICKUP
- **LOW TEMPERATURE OIL** WORKS WELL IN HOT OR COLD TEMPERATURES

**ULTRA-LOW TEMPERATURE OIL, OR BIODEGRADABLE AVAILABLE*

Contact:
sales@crarent.com
service@crarent.com



Give us a call
(855) 898-4811

CRARENT.COM





Contact:
sales@crarent.com
service@crarent.com



Give us a call
(855) 898-4811

CRARENT.COM



STANDARD FEATURES (CONT.)

- **DRIVER LIGHT** IS ILLUMINATED SIGNALING THE HAULER IT IS SAFE TO REMOVE THE CONTAINER
- **YELLOW LIGHT** FLASHES TO LET DRIVER KNOW THE CONTAINER IS NOT IN PLACE
- **FULLY REMOVABLE TOP AND REAR COVER** FOR EASE OF MAINTENANCE

OPTIONAL FEATURES


- **OIL HEATER** (RECOMMENDED FOR EXTREME COLD)
- **AUTOMATIC ODOR SUPPRESSION**
- **ULTRA-LOW TEMPERATURE OR BIODEGRADABLE OIL**
- **CHUTE EXTENSION**
- **LOADING PLATFORM**
- **THROUGH WALL INSTALLATION**
- **SINGLE PHASES POWER UNIT AVAILABLE**

DIMENSIONS


COLORS

*COLOR MATCH AVAILABLE


Extra White F75WC7	International Red F75RC7	Implement Orange F75EC9	Implement Yellow F75YC18	Equipment Yellow F75WC7	Enviro Green F75GC19	Equipment Blue F75LC14	Revers Black F75BC14
Starburst White SW7409	Allen Red SW7417	Machinery Red SW7422	Power Orange SW7413	Heavy Equip. Orange SW7412	Agricultural Yellow SW7410	Tractor Green SW7420	Equipment Green SW7420
Blue Ribbon SW7421	Motor Blue SW7416	Equipment Tan SW7411	Primer E61A400	Jet Black Shear-Kam Low Gloss SW7424 F75T01	Jet Black Shear-Kam Semi Gloss SW7474 F75BC17	Jet Black Shear-Kam Fast Dry SW7474 F75B203	




6YD




BACK VIEW



SIDE VIEW




FRONT VIEW

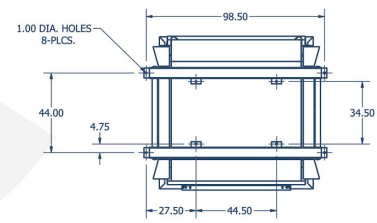


BOTTOM VIEW


8YD




BACK VIEW



SIDE VIEW



FRONT VIEW

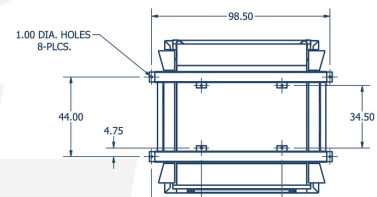

BOTTOM VIEW